

POWDER FIRE EXTINGUISHER

STORED PRESSURE 6 KG

Model: DCP 6- FE

55A – 233B C



TECHNICAL DATA	Model	DCP 6 - FE
	CAPACITY	6 kg
	height (mm)	600 mm
	Diameter (mm)	160 mm
	Cylinder Material	Steel alloy
	Pressurizing Gas	Dry Air – N2
	Test Pressure (bar)	26 bar
	Working Pressure	14 bar
	Weight Full (kg)	9.8 kg
	JET Range (m)	7 M
	Discharge Time(S)	16 SEC
	Fire Rating	55A – 233B C
	Temperature range	-30°C TO +60°C




METHOD OF USE

Discharge entire contents onto the fire from 1 to 3 metre distance. This extinguisher should be serviced at least once a year by an approved service engineer only in accordance with EN. Recharging should be carried out to EN only using recommended by the manufacturer.

— Fire Extinguisher —

NO	DESCRIPTION	NO	DESCRIPTION
1	COMPLETE VALVE	9	SAFETY PIN
2	CONTROL VALVE	10	SIPHON TUBE
3	SAFETY VALVE	11	DISCHARGE HOSE
4	PISTON	12	AGENT (POWDER)
5	SAFETY PIN	13	WALL BRACKET
6	MANOMETER	14	METAL CYLINDER
7	SPRING	15	LABEL
8	O-RING		

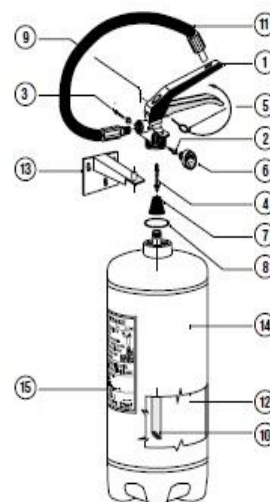

SILVA- S.R.L

This data specification sheet provides guidance only. It does not represent scientific or professional advice to any recipient or third party reader. Whilst great care has been taken to compile accurate data herein, SILVA S.R.L does not accept any responsibility or legal liability for any errors or omissions.

